



Test Report issued under the responsibility of:

Intertek Testing Services Shenzhen Ltd.

Guangzhou Branch

TEST REPORT
IEC 61347-2-13
Part 2: Particular requirements:
Section Thirteen – d.c. or a.c. supplied electronic controlgear for
LED modules

Report Number.....: GZ12051856-1

Date of issue.....: 29 Aug. 2012

Total number of pages..... 37

Applicant's name.....: Eaglerise Electronics (Foshan) Co., Ltd.

Address.....: No. 4, East Huanzhen Road, Beijiao, Shunde, Foshan, Guangdong,
528000, China

Test specification:

Standard: IEC 61347-2-13:2006 used in conjunction with IEC 61347-1
(Second Edition) : 2007+A1:2010
 EN 61347-2-13:2006 used in conjunction with EN 61347-1:
2008 + A1: 2011(See appendix of TRF No.: IEC61347_2_13C)

Test procedure.....: S + LVD

Non-standard test method.....: N/A

Test Report Form No.: IEC61347_2_13C

Test Report Form(s) Originator: Intertek Semko AB


Master TRF.....: 2011-06



Copyright © 2011 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

Test item description.....	: Electronic controlgear for LED (Electronic LED driver)
Trade Mark	: 
Manufacturer.....	: Same as applicant
Model/Type reference.....	: EIP008C****LS
	Remark: The 1st to 4th “*” indicate the output current of LED driver; can be replaced by “0200” to “1000” and increasing in multiplies of 50. “0200” means 200 mA; “1000” means 1000 mA.
Ratings.....	: Input: 220-240 VAC; 50/60 Hz; 0,07 A; Class II; IP 20; SELV; ta 50 °C; tc 75 °C; Independent type; 110 °C thermal protection; Inherently short-circuit proof; MM mark; Output: Constant current type for output; Suitable for direct mounting on normally flammable surfaces; Other parameters refer to appendix for model list.


Testing procedure and testing location:	
<input checked="" type="checkbox"/> CB Testing Laboratory:	Intertek Testing Services Shenzhen Ltd. Guangzhou Branch
Testing location/ address	Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City, GETDD, Guangzhou, China
<input type="checkbox"/> Associated CB Laboratory:	
Testing location/ address	
Tested by (name + signature).....	Julia Hu 
Approved by (+ signature)	Shelley Ying 
<input type="checkbox"/> Testing procedure: TMP	
Testing location/ address	
Tested by (name + signature).....	—
Approved by (+ signature)	—
<input type="checkbox"/> Testing procedure: WMT	
Testing location/ address	
Tested by (name + signature).....	—
Witnessed by (+ signature)	—
Approved by (+ signature)	—
<input type="checkbox"/> Testing procedure: SMT	
Testing location/ address	
Tested by (name + signature).....	—
Approved by (+ signature)	—
Supervised by (+ signature).....	—
<input type="checkbox"/> Testing procedure: RMT	
Testing location/ address	
Tested by (name + signature).....	—
Approved by (+ signature)	—
Supervised by (+ signature).....	—

<p>List of Attachments (including a total number of pages in each attachment): This report is totally 37 pages; Page 1-30 is test report; Page 31 is model list; Page 32-37 is product photos.</p>	
<p>Summary of testing: The test samples fulfilled the requirement of the standard. All models had the same mechanical structure, output load, PCB layout; the only deference is the parameters for the components used in secondary circuit. Model EIP008C1000LS was selected to do the full tests as its maximum secondary output current. Models EIP008C0600LS; EIP008C0200LS were also selected to do abnormal conditions test and construction check.</p>	
<p>Tests performed (name of test and test clause): 7 Marking 8 Protection against accidental contact with live parts 9 Terminals 11 Moisture resistance and insulation 12 Electric strength 14 Fault conditions 16 Abnormal conditions 17 Construction 18 Creepage distances and clearances 19 Screws, current-carrying parts and connections 20 Resistance to heat, fire and tracking 21 Resistance to corrosion Annex C Particular requirements for electronic lamp controlgear with means of protection against overheating Annex I Particular additional requirements for independent SELV d.c. or a.c. supplied electronic step-down convertors for filament lamps</p>	<p>Testing location: Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City, GETDD, Guangzhou, China</p>
<p>Summary of compliance with National Differences: Not checked.</p>	

Copy of marking plate

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBS that own these marks.

(Representative)

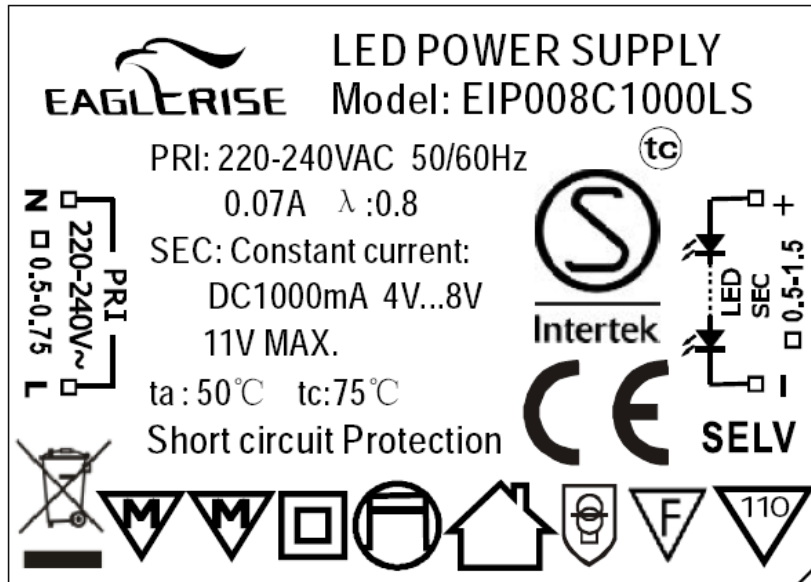

Location: attached on the enclosure and visible during installation

Remark on above marking:

1. The height of graphical symbols shall not be less than 5 mm;
2. The height of letters and numerals shall be not less than 2 mm.

Test item particulars:	
Classification of installation and use.....:	Independent; Class II; for use with LED
Supply Connection.....:	Terminal blocks
Possible test case verdicts:	
- test case does not apply to the test object.....:	N/A
- test object does meet the requirement.....:	P (Pass)
- test object does not meet the requirement.....:	F (Fail)
Testing:	
Date of receipt of test item.....:	28 Mar. 2012
Date (s) of performance of tests.....:	28 Mar. 2012 to 29 Aug. 2012

General remarks:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

"(See Enclosure #)" refers to additional information appended to the report.

"(See appended table)" refers to a table appended to the report.

Throughout this report a comma is used as the decimal separator.

Clause numbers between brackets refer to clauses in IEC 61347-1.

When determining for test conclusion, measurement uncertainty of tests has been considered.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

The test report only allows to be revised only within the report defined retention period unless standard or regulation was withdrawn or invalid.

The clause which indicated with * is the subcontract test item.

This report should be read with test report GZ12051856-2 for Additional requirements of independent Electronic controlgear for LED according to standard EN 60598-2-6:1994+A1:1997 used in conjunction with EN 60598-1:2008+A11: 2009.

Manufacturer's Declaration per sub-clause 6.2.5 of IEC 60335-1:

The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided

Yes

Not applicable

When differences exist; they shall be identified in the General product information section.

Name and address of factory (ies) : Name: Eaglerise Electronics (Foshan) Co., Ltd.
Address: No. 4, East Huanzhen Road, Beijiao, Shunde, Foshan, Guangdong, 528000, China.

General product information:

The products covered by this report are independent; SELV; LED drivers.

IEC 61347-2-13			
Clause	Requirement + Test	Result - Remark	Verdict

4	GENERAL REQUIREMENTS		P
	Compliance of independent controlgear enclosure with EN 60 598-1		P
	Independent SELV controlgear comply with Annex I	(see Annex I)	P

6 (6)	CLASSIFICATION		—
	Independent convertor.....	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
	Built-in convertor	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	Integral convertor	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	SELV-equivalent or isolating convertor	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	Auto-wound convertor	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	Independent SELV controlgear	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—

7	MARKING		P
7.1 (7.1)	Mandatory markings:		P
	- mark of origin		P
	- model number, type reference	EIP008C1000LS (Representative)	P
	- symbol for independent convertor, if applicable		P
	- correlation between interchangeable parts and convertor marked		N/A
	- rated supply voltage (V)	220-240	P
	- earthing symbol		N/A
	- wiring diagram		P
	- value of t _c	75 °C	P
	- symbol for declared temperature	110 °C	P
	Constant voltage type:	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	- rated supply voltage (V)		N/A
	Constant current type:	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
	- rated output current (A)	1000 mA	P
	- rated maximum output voltage (V)	11 VDC	P
	- indication if for LED modules only		N/A
7.2 (7.1)	- information to be provided, if applicable:		P
	- declaration on protection against accidental contact		P

IEC 61347-2-13			
Clause	Requirement + Test	Result - Remark	Verdict
	- cross-section of conductors (mm ²)	Input: 0,5~0,75 mm ² ; Output: 0,5~1,5 mm ²	P
	- number, type and wattage of lamp(s)		P
	- declaration of mains connected windings		N/A
	- declaration for SELV-equivalent convertor		N/A
- (7.2)	Marking durable and legible		P
	Rubbing 15 s water, 15 s petroleum; marking legible		P

8 (10)	PROTECTION AGAINST ACCIDENTAL CONTACT WITH LIVE PARTS		P
- (10.1)	Controlgear protected against accidental contact with live parts		P
- (A2)	The current flowing between the part concerned and earth is measured and does not exceed 0,7 mA (peak) or 2 mA d.c. :		N/A
- (A2)	For frequencies above 1 kHz, the current does not exceed 0,7 mA (peak) multiplied by the value of the frequency in kilohertz or 70 mA (peak) :		N/A
- (A3)	The voltage between the part concerned and any accessible part is measured and does not exceed 34 V (peak)		N/A
- (10.1)	Lacquer or enamel not used for protection or insulation		P
	Adequate mechanical strength on parts providing protection		P
- (10.2)	Capacitors > 0,5 μF: voltage after 1 min (V): < 50 V	Max. 0,15 μF Measured max. 12 V peak discharged voltage after 1 second.	N/A
8.1	SELV-equivalent controlgear accessible parts are insulated from live parts by double or reinforced insulation according 8.6 and 13.1 in IEC 60065		N/A
8.2	Exposed terminals of SELV or SELV-equivalent controlgear if: - the rated or maximum rated output voltages ≤ 25 V r.m.s. - the no-load output voltage ≤ 30 V r.m.s. or 33 √2 V peak		N/A
	Insulated terminals if convertor with rated output voltage > 25 V		N/A
	One capacitor Y1 or two capacitors Y2 complying with IEC 60384-14 of the same values used in series between SELV or SELV-equivalent output and primary circuits	One Y1 capacitor	P

IEC 61347-2-13			
Clause	Requirement + Test	Result - Remark	Verdict

	Other components bridging the separating transformer complying with IEC 60065, clause 14		N/A
--	--	--	-----

9 (8)	TERMINALS		P
	Separately approved, component list	(see Annex 1)	P
	Screw terminals: compliance with Section 14 of IEC 60598-1	(see Annex 2)	N/A
	Screwless terminals: compliance with Section 15 of IEC 60598-1	(see Annex 3)	N/A

10 (9)	PROVISION FOR EARTHING		N/A
	Terminal complying with clause 8 in Part 1		N/A
	Locked against loosening and not possible to loosen by hand		N/A
	Not possible to loosen clamping means unintentionally on screwless terminals		N/A
	Earthing via means of fixing		N/A
	Earthing terminal only used for the earthing of the control gear		N/A
	All parts of material minimizing the danger of electrolytic corrosion		N/A
	Made of brass or equivalent material		N/A
	Contact surface bare metal		N/A
	Earth contact via the track on the printed board		N/A
	Test with a current of 25 A between earthing terminal and each of the accessible metal parts; measured resistance (Ω): $< 0,5 \Omega$		N/A

11 (11)	MOISTURE RESISTANCE AND INSULATION		P
	After storage 48 h at 91-95% relative humidity and 20-30 °C measuring of insulation resistance with d.c. 500 V ($M\Omega$):		P
	For basic insulation $\geq 2 M\Omega$	$>100 M\Omega$	P
	For double or reinforced insulation $\geq 4 M\Omega$	$>100 M\Omega$	P
	Adequate insulation between input and output terminals not bounded together in SELV-equivalent controlgear		—

12 (12)	ELECTRIC STRENGTH		P
	Immediately after clause 11 electric strength test for 1 min		P

IEC 61347-2-13			
Clause	Requirement + Test	Result - Remark	Verdict
	Working voltage ≤ 42 V, test voltage 500 V	500 V	P
	Working voltage > 42 V ≤ 1000 V, test voltage (V):		P
	Basic insulation, 2U + 1000 V	1480 V	P
	Supplementary insulation, 2U + 1750 V		N/A
	Double or reinforced insulation, 4U + 2750 V	3710 V	P
	No flashover or breakdown		P
	Windings in separating transformers in SELV-equivalent convertors according to 14.3.2 of IEC 60065		N/A

14 (14)	FAULT CONDITIONS (Carried out on three samples)		P
	When operated under fault conditions the controlgear:		P
	- does not emit flames or molten material		P
	- does not produce flammable gases		P
	- protection against accidental contact not impaired		P
	Thermally protected ballasts does not exceed the marked temperature value		P
	Fault conditions: capacitors, resistors or inductors without proof of compliance with relevant specifications have been short-circuited or disconnected		P
- (14.1)	Short-circuit of creepage distances and clearances if less than specified in clause 18 (except between live parts and accessible metal parts)	(see appended table)	N/A
	Creepage distances on printed boards less than specified in clause 18 provided with coating according to IEC 60664-3		N/A
- (14.2)	Short-circuit or interruption of semiconductor devices	(see appended table)	P
- (14.3)	Short-circuit across insulation consisting of lacquer, enamel or textile	(see appended table)	N/A
- (14.4)	Short-circuit across electrolytic capacitors	(see appended table)	P
- (14.5)	After the tests has been carried out on three samples:		P
	The insulation resistance ≥ 1 M Ω	>100 M Ω	P
	No flammable gases		P
	No accessible parts have become live		P
	During the tests, a five-layer tissue paper, where the test specimen is wrapped, does not ignite		P

IEC 61347-2-13			
Clause	Requirement + Test	Result - Remark	Verdict
- (14.6)	Relevant fault condition tests with high-power supply	Yes	—
	Temperature declared thermally protected lamp controlgear fulfil requirements in Annex C		P

15	TRANSFORMER HEATING		N/A
	Windings of separating transformer in a SELV-equivalent controlgear fulfil the requirements according to 7.1 and 11.2 of IEC 60065		N/A
15.1	Temperatures do not exceed the changed values of the values in column 2 of Table 3 of IEC 60065, in respect to relevant ambient temperature at t_c , under normal operation		N/A
15.2	Temperatures do not exceed the changed values of the values in column 3 of Table 3 of IEC 60065, in respect to relevant ambient temperature at t_c , under abnormal conditions of Cl. 16 and fault conditions of Cl. 14		N/A
	Ambient temperature at t_c		—

16	ABNORMAL CONDITIONS		P
	Safety not impaired when the controlgear is operated at any voltage between 90% and 110% of rated voltage		P
16.1	Control gear which are of the constant voltage output type:		N/A
	a) No LED module inserted		N/A
	b) Double LED modules or equivalent load connected to the output terminals		N/A
	c) Output terminal short-circuited (20 cm and 200 cm or declared length)		N/A
	During and at the end of the tests no defect impairing safety, nor any smoke or flammable gases produced		N/A
16.2	Control gear which are of the constant current output type:		P
	a) No LED module connected		P
	b) Double the LED modules or equivalent load connected in series to the output terminals		P
	c) Output terminal short-circuited (20 cm and 200 cm or declared length)	10 cm and 200 cm	P
	Maximum output voltage not exceeded		P
	During and at the end of the tests no defect impairing safety, nor any smoke or flammable gases produced		P

IEC 61347-2-13			
Clause	Requirement + Test	Result - Remark	Verdict

17 (15)	CONSTRUCTION		P
- (15.1)	Wood, cotton, silk, paper and similar fibrous material not used as insulation		P
- (15.2)	Printed boards used as internal connections complies with clause 14		P
	Socket-outlet in the output circuit does not accept plugs complying with IEC 60083 and IEC 60906		N/A
	Not possible to engage plugs accepted by socket-outlet in the output circuit with socket-outlets complying with IEC 60083 and IEC 60906		N/A

18 (16)	CREEPAGE DISTANCES AND CLEARANCES		P
	Creepage distances and clearances according to Table 3 and 4, as appropriate	(see appended table)	P
	Printed boards see clause 14		P
	Insulating lining of metallic enclosures		N/A

19 (17)	SCREWS, CURRENT-CARRYING PARTS AND CONNECTIONS		P
	Screws, current-carrying parts and connections in compliance with IEC 60598-1 (clause numbers between parentheses refer to IEC 60598-1)		P
(4.11)	Electrical connections		P
(4.11.1)	Contact pressure		P
(4.11.2)	Screws:		N/A
	- self-tapping screws		N/A
	- thread-cutting screws		N/A
	- at least two self-tapping screws		N/A
(4.11.3)	Screw locking:		N/A
	- spring washer		N/A
	- rivets		N/A
(4.11.4)	Material of current-carrying parts		P
(4.11.5)	No contact to wood		P
(4.12)	Mechanical connections and glands		P
(4.12.1)	Mechanical stress		P
	Screws not made of soft metal		P
	Screws of insulating material		N/A
	Torque test: part; torque (Nm)	Fixed enclosure screw: 0,5 Nm	P

IEC 61347-2-13			
Clause	Requirement + Test	Result - Remark	Verdict
	Torque test: part; torque (Nm)		N/A
	Torque test: part; torque (Nm)		N/A
(4.12.2)	Screw diameter < 3 mm screwed into metal		N/A
(4.12.4)	Locked connections		N/A
(4.12.5)	Screwed glands: force (N)		N/A

20 (18)	RESISTANCE TO HEAT, FIRE AND TRACKING		P
- (18.1)	Parts of insulating material retaining live parts in position, ball-pressure test:		P
	- part; test temperature (°C)	Enclosure; 103 °C	P
	- part; test temperature (°C)	Bobbin of T1; 125 °C	P
- (18.2)	Printed boards in accordance with 8.7 of IEC 61189-2 and relevant parts of IEC 61249-2		N/A
- (18.3)	External parts of insulating material preventing electric shock glow-wire test 650 °C	Enclosure	P
- (18.4)	Parts of insulating material retaining live parts in position, needle-flame test 10 s:		P
	- flame extinguished within 30 s	Bobbin of T1	P
	- no flaming drops igniting tissue paper		P
- (18.5)	Tracking test according section 13 of IEC 60598-1 if required		N/A

21 (19)	RESISTANCE TO CORROSION		N/A
	Applicable parts comply with 4.18.1 of IEC 60598-1		N/A
	Adequate varnish on the outer surface		N/A

- (20)	NO-LOAD OUTPUT VOLTAGE		N/A
	No load output voltage not differ more than 10 % from rated voltage		N/A

14	TABLE: tests of fault conditions		P
Part	Simulated fault		Hazard
DB1 primary input (Un=240V)	Short-circuited; No hazards, F1; L2 and L3 broken		No
C2	Short-circuited; No hazards, C3 broken		No
C8	Short-circuited; No hazards, recoverable when removed the fault		No

IEC 61347-2-13			
Clause	Requirement + Test	Result - Remark	Verdict
C7	Short-circuited; No hazards, recoverable when removed the fault		No
D1	Short-circuited; No hazards, recoverable when removed the fault		No
D5	Short-circuited; No hazards, C2 broken		No
D7	Short-circuited; No hazards, recoverable when removed the fault		No
Q1 (c&e)	Short-circuited; No hazards, L3 broken		No

18 (16)	TABLE: creepage distances and clearances						N/A
	Minimum distances for a.c. (50/60 Hz) sinusoidal voltages						N/A
RMS working voltage (V) not exceeding	50	150	250	500	750	1000	
1) minimum distances between live parts of different polarity. Specify the value measured.							
2) minimum distances between live parts and accessible parts which are permanently fixed to the ballast, including screws or devices for fixing covers or fixing the ballast to its support. Specify the value measured.							
- required creepage distances (mm), insulation PTI ≥ 600	0,6	1,4	1,7	3	4	5,5	
- required creepage distances (mm), insulation PTI < 600	1,2	1,6	2,5	5	8	10	
- required clearances (mm)	0,2	1,4	1,7	3	4	5,5	
3) minimum distances between live parts and a flat supporting surface or a loose metal cover, if any, if the construction does not ensure that the values under 2 above are maintained under the most unfavourable circumstances							
- required clearances (mm)	2	3,2	3,6	4,8	6	8	
	Minimum distances for non-sinusoidal pulse voltages						N/A
rated pulse voltage (peak kV)	2,0	2,5	3,0	4,0	5,0	6,0	8,0
required minimum distances, clearances (mm)	1,0	1,5	2	3	4	5,5	8
Specify the value measured							
rated pulse voltage (peak kV)	10	12	15	20	25	30	40
required minimum distances, clearances (mm)							
Specify the value measured							
rated pulse voltage (peak kV)	50	60	80	100	-	-	-
required minimum distances, clearances (mm)	75	90	130	170	-	-	-
Specify the value measured							

IEC 61347-2-13			
Clause	Requirement + Test	Result - Remark	Verdict

A	ANNEX A (NORMATIVE), TEST TO ESTABLISH WHETHER A CONDUCTIVE PART IS A LIVE PART WHICH MAY CAUSE AN ELECTRIC SHOCK		N/A
A.2	See clause 8 A.2 in this Test Report		N/A
A.3	See clause 8 A.3 in this Test Report		N/A

C	ANNEX C – PARTICULAR REQUIREMENTS FOR ELECTRONIC LAMP CONTROLGEAR WITH MEANS OF PROTECTION AGAINST OVERHEATING		P
C3	GENERAL REQUIREMENTS		P
C3.1	Thermal protection means integral with the convertor, protected against mechanical damage		P
	Renewable only by means of a tool		N/A
	If function depending on polarity, for cord-connected equipment protection means in both leads		N/A
	Thermal links comply with IEC 60691		N/A
	Electrical controls comply with IEC 60730-2-3		N/A
C3.2	No risk of fire by breaking (clause C7)		P
C5	CLASSIFICATION		P
	a) automatic resetting type	No	—
	b) manual resetting type	No	—
	c) non-renewable, non-resetting type	No	—
	d) renewable, non-resetting type	No	—
	e) other type of thermal protection; description:	Yes, Inherently circuit feedback protection	P
C6	MARKING		P
C6.1	Symbol for temperature declared thermally protected ballasts	110 °C	P
C6.2	Declaration of the type of protection provided	In the user manual	P
C7	LIMITATION OF HEATING		P
C7.1	Preselection test:		P
	Test sample placed for at least 12 h in an oven having temperature (t _c - 5) K	70 °C	P
	No operation of the protection device		P
C7.2	Functioning of protection means		P
	Normal operation of the sample in a test enclosure according to Annex D at an ambient temperature such that (t _c +0; -5) °C is obtained		P

IEC 61347-2-13			
Clause	Requirement + Test	Result - Remark	Verdict
	No operation of the protection device		P
	Introducing of the most onerous test condition determined during test of clause 14		P
	Output of windings connected to the mains supply short-circuited, and other part of the convertor operated under normal conditions		N/A
	Increasing of the current through the windings continuously until operation of the protection means		P
	Continuous measuring of the highest surface temperature		P
	Ballasts according to C5 a) or C5 e) operated until stable conditions are achieved		P
	Automatic-resetting thermal protectors working 3 times		N/A
	Ballasts according to C5 b) working 6 times		N/A
	Ballasts according to C5 c) and C5 d) working once		N/A
	Highest temperature does not exceed the marked value	Measured Max. 79 °C	P
	Any overshoot of 10% over the marked value within 15 min		N/A

D	ANNEX D – REQUIREMENTS FOR CARRY OUT THE HEATING TESTS OF THERMALLY PROTECTED LAMP CONTROLGEAR		P
	Tests in C7 performed in accordance with Annex D, if applicable		P

E	ANNEX E – USE OF CONSTANT S OTHER THAN 4500 IN t_w TESTS		N/A
	Annex E if windings of 50 Hz/60 Hz		N/A
E1	Constant S claimed		N/A
	Claimed test method		N/A
E2	Procedure A		N/A
	Adequate data provided by the manufacturer		N/A
	The inverse of the slope is greater than or equal to the claimed value of S		N/A
	Compliance with the failure criteria for procedure B		N/A
E3	Procedure B		N/A
	Claimed value of T_1		N/A
	Claimed value of T_2		N/A

IEC 61347-2-13			
Clause	Requirement + Test	Result - Remark	Verdict
	Endurance test carried out at:		N/A
	T ₁ (7 samples)		N/A
	T ₂ (7 samples)		N/A
	Duration of test calculated from equation (2)		N/A
	T ₁		N/A
	T ₂		N/A
	During the test: - No open circuit - No breakdown insulation		N/A
	The claimed constant S is deemed to be verified		N/A

F	ANNEX F - DRAUGHT-PROOF ENCLOSURE		P
	Draught-proof enclosure in accordance with the description		P
	Dimensions of the enclosure		P
	Other design; description		N/A

H	ANNEX H - TESTS		P
	All tests performed in accordance with the advice given in Annex H, if applicable		P

I	ANNEX I - PARTICULAR ADDITIONAL REQUIREMENTS FOR INDEPENDENT SELV D.C. OR A.C. SUPPLIED ELECTRONIC CONTROLGEAR FOR LED MODULES		P
I.3	Classification		—
I.3.1	Class I	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	Class II	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
I.3.2	a) non-inherently short circuit proof controlgear	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	b) non-inherently open circuit proof controlgear	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	c) inherently short circuit proof controlgear	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
	d) inherently open circuit proof controlgear	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	e) fail safe controlgear	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	f) non-short-circuit proof controlgear	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	g) non-open-circuit proof controlgear	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
I.4	Marking		P
	Adequate symbols are used		P

IEC 61347-2-13			
Clause	Requirement + Test	Result - Remark	Verdict
I.5	Protection against electric shock		P
I.5.1	No connection between output winding and body		P
	No connection between output winding and protective earthing circuit		N/A
I.5.2	Input and output circuits electrically separated from each other		P
I.5.2.1	Insulation between input and output winding of the HF-transformer consists of double or reinforced insulation		P
	Class II: insulation between input/output and body consists of double or reinforced insulation		P
	Class I: insulation between input and body consists of basic and between output and body supplementary insulation		N/A
I.5.2.2	Insulation between input and output winding via the core consists of double or reinforced insulation		P
	Insulation between cord and windings of the HF-transformer consists of basic insulation		P
I.5.2.3	Serrated tape, additional layer		N/A
I.5.2.4	Class I controlgear for fixed connection provided with basic insulation plus protective screening comply with the following conditions:		N/A
	a) Insulation between the input winding and the protective screen complies with the requirements for basic insulation		N/A
	b) Insulation between the protective screen and the output winding complies with the requirements for basic insulation		N/A
	c) Metal screen consists of a metal foil or of a wire wound screen		N/A
	d) Metal screen so arranged that both edges cannot simultaneously touch a magnetic core		N/A
	e) Metal screen and its lead-out wire have a cross-section sufficient to ensure that an overload device will open the circuit before the screen is destroyed		N/A
	f) Lead-out wire sufficiently fixed to the metal screen		N/A
I.5.2.5	Last turn of each winding of the transformer retained by positive means		P
	Impregnated winding		N/A
	Winding held together by means of insulating material		P

IEC 61347-2-13			
Clause	Requirement + Test	Result - Remark	Verdict
I.5.3	Components bridging between input and output circuit		P
I.5.3.1	Used capacitors and resistors comply with 8.2	Y1	P
I.5.3.2	Used opto-couplers		N/A
I.6	Heating		—
I.6.1	No excessive temperatures in normal use		P
	Used material classified as Class _____	130 °C	—
	Stated value of t _a _____	50 °C	—
I.6.2	Upri: 1.06 time supply rated voltage	254,4 V	—
	Determined temperature rises in windings:		P
	- Primary: _____ K	41	
	- Limit max: _____ K	70	
	- Secondary: _____ K	42	
	- Limit max: _____ K	70	
	After the test:		P
	- no connections have worked loose		P
	- no reduction of creepage distances and clearances		P
	- no flow of sealing compound		N/A
	- no operation of protecting devices		P
	- electric strength test between input and output windings		P
I.6.3	Cycling test (10 cycles):		N/A
I.6.3.1	- heat run at _____ K		N/A
I.6.3.2	- moisture treatment 48 h		N/A
I.6.3.3	- vibration test 1 h; 1,5 g		N/A
I.6.3.4	After the tests:		N/A
	- insulation resistance		N/A
	- dielectric strength test at 35 % of specified value; test voltage _____ V		N/A
	- Current or the ohmic component does not deviates by more than 30 %		N/A
I.7	Short-circuit and overload protection		P
I.7.1	Upri: 1.06 times rated voltage or 0.94 and 1.06 times rated supply voltage - used voltage _____ V	254,4	P
I.7.2 I.7.3 I.7.4	Determined temperature rise in windings and on other parts:		P

IEC 61347-2-13			
Clause	Requirement + Test	Result - Remark	Verdict
	- test according to Clause _____	1.7.2	P
	- Primary winding _____ K	0	P
	- Limit max _____ K	125	P
	- Secondary winding _____ K	0	P
	- Limit max _____ K	125	P
	- External enclosure _____ K	0	P
	- Limit max _____ K	55	P
	- PVC insulation of input wiring _____ K	0	P
	- Limit max _____ K	35	P
	- PVC insulation of output wiring _____ K	0	P
	- Limit max _____ K	35	P
	- Supports _____ K	0	P
	- Limit max _____ K	55	P
I.7.5	Fail-safe convertors		N/A
I.7.5.1	- Upri: 1.06 times rated supply voltage V:		—
	- Isec: 1.5 times rated output current A:		—
	- time until steady-state conditions t1 (h):		—
	- time until failure t2 (h): ≤ t1; ≤ 5 h:		N/A
I.7.5.2	During the test:		N/A
	- no flames, molten material, etc.		N/A
	- temperature rise of enclosure ≤ 150 K		N/A
	- temperature rise of plywood support ≤ 100 K		N/A
	After the test:		N/A
	- electric strength (test voltage; 35 % of specified value); no flashover or breakdown for primary-to-secondary and for primary-to-body		N/A
	- live parts not accessible by test finger through holes of enclosure		N/A
I.8	Insulation resistance and electric strength		P
I.8.1	Conditioned 48 h between 91 % and 95 %		P
I.8.2	Adequate insulation (500 V d.c. for 1 min) between:		P
	Live parts and the body -for basic insulation not less than 2 MΩ:		N/A
	Live parts and the body -for reinforced insulation not less than 4 MΩ:	>100 MΩ	P
	Input- and output circuits not less than 5 MΩ:	>100 MΩ	P

IEC 61347-2-13			
Clause	Requirement + Test	Result - Remark	Verdict
	Metal parts of class II controlgear which are separated from live parts by basic insulation only and the body not less than 5 MΩ		N/A
	Metal foil in contact with the inner and outer surfaces of enclosures of insulating material not less than 2 MΩ	>100 MΩ	P
I.8.3	Electric strength test:		P
	1) Between live parts of input circuits and live parts of output circuits	3750 V	P
	2) Over basic or supplementary insulation between:		P
	a) live parts which are or may become of different polarity		N/A
	b) live parts and body if intended to be connected to protective earth		N/A
	c) accessible metal parts and a metal rod of the same diameter as the flexible cable or cord		N/A
	d) live parts and an intermediate metal part		N/A
	e) intermediate metal parts and the body		N/A
	3) Over reinforced insulation between the body and live parts	3750 V	P
	No flashover or breakdown occurred		P
I.9	Construction		P
I.9.1	Comply with all requirements		P
I.9.2	The distance between input and output terminals shall not be less than 25 mm	48 mm	P
I.10	Components		N/A
I.10.1	Socket-outlets in the output circuit does not accept plugs complying with IEC 60083 and IEC 60906-1		N/A
I.10.2	Self-resetting protective devices shall not be used unless it is certain that there will be no hazards		N/A
	Compliance is checked by connecting the controlgear for 48 h at 1.06 times the rated voltage with the output short-circuited		N/A
I.11	Creepage distances and clearances		P
	1. Insulation between input and output circuits:		P
	a) measured values > specified values (mm)	Between component of primary circuit and secondary circuit: >=6,0 mm (limited: 6,0 mm);	P
	b) measured values > specified values (mm)		N/A
	c) measured values > specified values (mm)	Certificated reinforce insulation winding as secondary winding; Three layers insulation tapes: 0,12 mm thickness (limited: 0,1 mm)	P

IEC 61347-2-13			
Clause	Requirement + Test	Result - Remark	Verdict
	ANNEX 2: screw terminals (part of the controlgear)		N/A
(14)	SCREW TERMINALS		N/A
	ANNEX 3: screwless terminals (part of the controlgear)		N/A
(15)	SCREWLESS TERMINALS		N/A

IEC 61347-2-13			
Clause	Requirement + Test	Result - Remark	Verdict

Appendix of TRF No.: IEC61347_2_13C

	CENELEC COMMON MODIFICATIONS (EN)	P
--	-----------------------------------	---

16 (16)	TABLE: creepage distances and clearances						P	
	Minimum distances for a.c. (50/60 Hz) sinusoidal voltages						P	
	RMS working voltage (V) not exceeding	50	150	250	500	750	1000	
1	between live parts of different polarity	N/A	--	3,2 mm	--	--	--	
2	between live parts and accessible metal parts which are permanently fixed to the ballast, including screws or devices for fixing covers or fixing the ballast to its support	$\geq 6,1$ mm	--	$\geq 6,1$ mm	--	--	--	
3	for ballasts declared not to rely on the luminaire enclosure for protection against electric shock – between live parts and outer accessible surface of insulating parts	$\geq 6,1$ mm	--	$\geq 6,1$ mm	--	--	--	
Creepage distances	Basic insulation	PTI \geq 600	0,6	0,8	1,5	3	4	5,5
		PTI<600	1,2	1,6	2,5	5	8	10
	Supplementary insulation	PTI \geq 600	--	0,8	1,5	3	4	5,5
		PTI<600	--	1,6	2,5	5	8	10
	Reinforced insulation	--	3,2	5	6	8	11	
Clearances	Basic insulation		0,2	0,8	1,5	3	4	5,5
	Supplementary insulation		--	0,8	1,5	3	4	5,5
	Reinforced insulation		--	1,6	3	6	8	11

	ANNEX : EMF requirement	P
--	-------------------------	---

	The tested product also complies to the requirements of EN 62493: 2010	P
--	--	---

IEC 61347-2-13			
Clause	Requirement + Test	Result - Remark	Verdict

Additional requirement of DIN 57710-14: 1982 (VDE 0710-14: 1982):

(1)	FIELD OF APPLICATION AND PURPOSE		P
(2)	DEFINITIONS		P
(3)	LABELS AND DESIGNATIONS		N/A
(3.1)	Furniture luminaires for discharge lamps with built-in ballast and may be used according to Section 1a)		N/A
(3.2)	Furniture luminaires for discharge lamps with built-in ballast and may be used according to Section 1b)		N/A
(3.3)	Details of the permissible installation or attachment possibilities shall be given in assembly instructions.		N/A
(3.4)	The manufacturer's documentation shall state that these luminaires are for furniture.		N/A
(4)	CONNECTION OF THE LUMINAIRES TO THE WIRING SYSTEM		P
(4.1)	The conductor cross-section is.....		N/A
(4.2)	Suitable strain relief devices shall be provided		P
(5)	COMPONENTS		P
(5.1)	If the reference to the envisaged lamp equipment is mounted that it is clearly visible when the lamp is changed, the maximum output may less than 40 W	LED driver	N/A
(5.2)	Only temperature limiters or temperature protection devices or safety temperature limiters may be used as temperature-dependent devices		P
(6)	HEATING		P
(6.1)	Luminaires shall be mounted in the least favourable position or according to the assembly instructions.	According to the assembly instruction	P
(6.2)	Luminaires according to Section 1a)		N/A
(6.2.1)	The limit temperature of mounting surface in normal operation is 130 °C, in abnormal operation is 180 °C.		N/A
(6.2.2)	Thermal test		N/A
(6.2.3)	The luminaires shall be closed opposite their mounting area.		N/A
(6.2.4)	Lead-in openings shall not be larger than specified in VDE 0710, Part 1/3.69, Section 9, b) 3.1		N/A
(6.2.5)	Larger fixing opening may be present, if they are automatically closed during assembly by covers supplied at the same time.		N/A
(6.2.6)	The number of openings for fixing the luminaires shall be adapted to the size and weight of the luminaires.		N/A
(6.2.7)	Smaller openings shall be limited to the necessary quantity and kept correspondingly small.		N/A
(6.2.8)	Pre-cut sheet-metal lugs can be used for fixing leads, as long as their size does not exceed about 10 mm x 40 mm.		N/A

IEC 61347-2-13			
Clause	Requirement + Test	Result - Remark	Verdict
(6.2.9)	Pre-punched openings closed when the luminaire is new shall likewise be permissible, insofar as they are not within the ballast area.		N/A
(6.2.10)	Opening other than those so far specified may be face the mounting area only if they are closed by covers which can be removed only by a tool.		N/A
(6.3)	Luminaires according to Section 1b), the mounting surface shall not exceed 95 °C		P
(6.3.1)	The mounting surface shall not exceed 115 °C during normal and abnormal operation with 1,1 Un	66 °C	P
(6.3.2)	Determination of the temperatures during abnormal operation and in the case of a ballast fault.		P
(6.3.2.1)	Luminaires without temperature-limiting devices.		N/A
(6.3.2.2)	Luminaires with temperature-limiting devices.		P
(6.4)	In the case of luminaires in which exceeding of the limit value is prevented by temperature-dependent devices, it shall be proved by the following test that disconnection takes place before or on attainment of the specified limit values. The limit is 180 °C for the luminaires according to 1a), 115 °C for the luminaires according to 1b).	79 °C	P
(7)	CORROSION RESISTANCE		N/A
(7.1)	The test according to VDE 0710, Part 1/3.69, Section 19.		N/A
(8)	REPAIR OF LUMINAIRE		N/A
	Only DIN 57701, Part 1/VDE 0701, Part 1 shall apply to the repair of luminaires in VDE 0710, Part 1/3.69, Section 21.		N/A

IEC 61347-2-13

Appendix I: model list

Model	Rated input voltage	Frequency	Output voltage range	Max. output voltage
EIP008C0200LS	220-240 VAC	50/60Hz	20V-40VDC	46VDC
EIP008C0250LS	220-240 VAC	50/60Hz	16V-32VDC	37VDC
EIP008C0300LS	220-240 VAC	50/60Hz	13V-26VDC	30VDC
EIP008C0350LS	220-240 VAC	50/60Hz	11.5V-23VDC	28VDC
EIP008C0400LS	220-240 VAC	50/60Hz	10V-20VDC	25VDC
EIP008C0450LS	220-240 VAC	50/60Hz	9V-17.8VDC	24VDC
EIP008C0500LS	220-240 VAC	50/60Hz	8V-16VDC	20VDC
EIP008C0550LS	220-240 VAC	50/60Hz	7.3V-14.6VDC	18VDC
EIP008C0600LS	220-240 VAC	50/60Hz	7V-13.5VDC	16VDC
EIP008C0650LS	220-240 VAC	50/60Hz	6.2V-12.3VDC	15VDC
EIP008C0700LS	220-240 VAC	50/60Hz	6V-11.4VDC	15VDC
EIP008C0750LS	220-240 VAC	50/60Hz	5.3V-10.7VDC	15VDC
EIP008C0800LS	220-240 VAC	50/60Hz	5V-10VDC	15VDC
EIP008C0850LS	220-240 VAC	50/60Hz	4.7V-9.4VDC	14VDC
EIP008C0900LS	220-240 VAC	50/60Hz	4.4V-8.9VDC	14VDC
EIP008C0950LS	220-240 VAC	50/60Hz	4.2V-8.4VDC	13VDC
EIP008C1000LS	220-240 VAC	50/60Hz	4V-8VDC	11VDC