

Test Report issued under the responsibility of:

Intertek Testing Services Shenzhen Ltd.

Guangzhou Branch


TEST REPORT IEC 61347-2-13 Part 2: Particular requirements Section Thirteen – d.c. or a.c. supplied electronic controlgear for LED modules	
Report Reference No.	GZ10120368-1
Date of issue	20 January 2011
Total number of pages	36
CB Testing Laboratory	Intertek Testing Services Shenzhen Ltd. Guangzhou Branch
Address	Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City, GETDD, Guangzhou, China
Applicant's name	Eaglerise Electric & Electronic (Foshan) Co., Ltd.
Address	Guicheng Sci-Tech Industrial Park, Jianping Road, Nanhai District, Foshan City, Guangdong Province, P.R. China
Test specification:	
Standard	<input type="checkbox"/> IEC 61347-2-13:2006 used in conjunction with IEC 61347-1:2007 <input checked="" type="checkbox"/> EN 61347-2-13:2006 used in conjunction with EN 61347-1:2008
Test procedure	S + LVD
Non-standard test method	N/A
Test Report Form No.	TTRF_IEC61347_2_13B+EN
TRF Originator	Intertek ETL Semko Guangzhou
Master TRF	Dated 2009-04
Copyright © 2007 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed. This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.	
Test item description	Electronic convertor for LED (Electronic LED driver)
Trade Mark	 EAGLERISE
Manufacturer	Eaglerise Electric & Electronic (Foshan) Co., Ltd.
Model/Type reference	ELP042C0700LSD1; ELP036C0700LSD1

Ratings.....:	Input: 220-240 V~; 50/60 Hz; Output: DC700 mA; Max. 65 VDC; 42 W for ELP042C0700LSD1; DC700 mA; Max. 48 VDC; 36 W for ELP036C0700LSD1 For Constant Current Type; Class II; SELV; Independent; IP20; ta: 50 °C; tc: 80 °C; Thermal protection: 110 °C; Inherently short-circuit proof; Suitable for directly mounting on normal flammability surface.
---------------	--

Testing procedure and testing location:	
<input checked="" type="checkbox"/> CB Testing Laboratory:	Intertek Testing Services Shenzhen Ltd. Guangzhou Branch
Testing location/ address	Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City, GETDD, Guangzhou, China
<input type="checkbox"/> Associated CB Laboratory:	
Testing location/ address	
Tested by (name + signature).....	Harry Zou <i>Harry Zou</i>
Approved by (+ signature)	Shelley Ying <i>Shelley Ying</i>
<input type="checkbox"/> Testing procedure: TMP	
Tested by (name + signature).....	—
Approved by (+ signature)	—
Testing location/ address	
<input type="checkbox"/> Testing procedure: WMT	
Tested by (name + signature).....	—
Witnessed by (+ signature).....	—
Approved by (+ signature)	—
Testing location/ address	
<input type="checkbox"/> Testing procedure: SMT	
Tested by (name + signature).....	—
Approved by (+ signature)	—
Supervised by (+ signature).....	—
Testing location/ address	
<input type="checkbox"/> Testing procedure: RMT	
Tested by (name + signature).....	—
Approved by (+ signature)	—
Supervised by (+ signature).....	—
Testing location/ address	

<p>Summary of testing:</p> <p>The tested samples fulfilled the requirements of specified standards.</p> <p>ELP042C0700LSD1 and ELP036C0700LSD1 have same circuit diagram; PCB layout and mechanical structure. The main differences between them are the wattage. ELP042C0700LSD1 was selected to do the tests as it has maximum wattage. And ELP036C0700LSD1 just selected to do the constructions test.</p>	
<p>Tests performed (name of test and test clause):</p> <p>4(4) General requirements 7(7) Marking 8(10) Protection against accidental contact with live parts 11(11) Moisture resistance and insulation 12(12) Electric strength 14(14) Fault conditions 16 Abnormal conditions 17(15) Construction 18(16) Creepage distances and clearances 19(17) Screws, current-carrying parts and connections 20(18) Resistance to heat, fire and tracking 21(19) Resistance to corrosion Annex C Particular requirements for electronic lamp controlgear with means of protection against overheating Annex I Particular additional requirements for independent SELV d.c. or a.c. supplied electronic step-down convertors for filament lamps</p>	<p>Testing location:</p> <p>Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City, GETDD, Guangzhou, China</p>
<p>Summary of compliance with National Differences:</p> <p>Not checked</p>	

Copy of marking plate

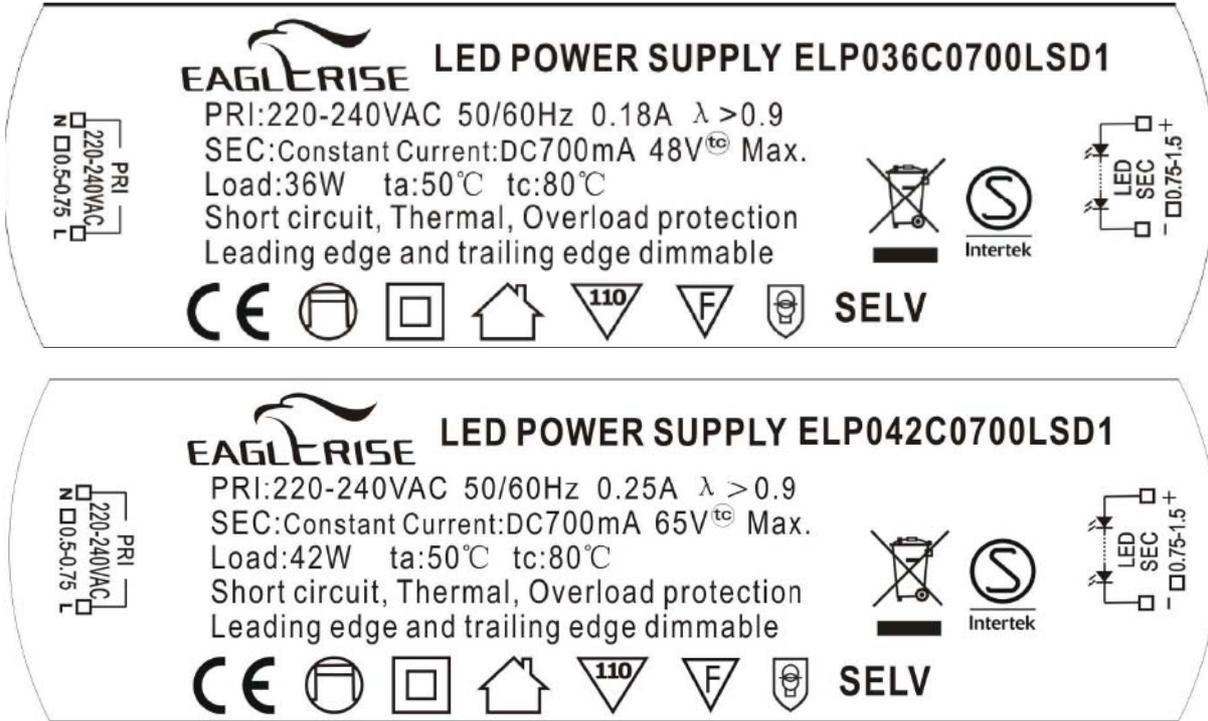

Location: Attached on the enclosure and visible during using

Remark on above marking:

1. The height of graphical symbols shall not be less than 5 mm;
2. The height of letters and numerals shall be not less than 2 mm.

Test item particulars..... :

Classification of installation and use..... : Independent; Class II; for use with LED

Supply Connection..... : Terminal block

Possible test case verdicts:

- test case does not apply to the test object..... : N/A (not applicable)
- test object does meet the requirement..... : P (Pass)
- test object does not meet the requirement : F (Fail)

Testing

Date of receipt of test item..... : 07 December 2010

Date (s) of performance of tests : 07 December 2010 to 31 December 2010

General remarks:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

"(See Enclosure #)" refers to additional information appended to the report.

"(See appended table)" refers to a table appended to the report.

Throughout this report a comma is used as the decimal separator.

Clause numbers between brackets refer to clauses in IEC 61347-1.

When determining for test conclusion, measurement uncertainty of tests has been considered.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

The test report only allows to be revised only within the report defined retention period unless standard or regulation was withdrawn or invalid.

The clause which indicated with * is the subcontract test item.

Additional requirements for independent LED power supply according to EN 60598-2-6 was evaluated in test report GZ10120368-2.

Total 36 pages; Page 1 to 25 for test report; Page 26 to 29 for component list; Page 30 to 36 for product photos.

Manufacturing site: Eaglerise Electric & Electronic (foshan) Co., Ltd.

Manufacturing address: Guicheng Sci-Tech Industrial Park, Jianping Road, Nanhai District, Foshan City, Guangdong Province, P.R. China

General product information:

The products covered by this report are Class II independent LED power supply.

IEC 61347-2-13

Clause	Requirement – Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

4 (4)	GENERAL REQUIREMENTS		—
	Compliance of independent controlgear enclosure with EN 60 598-1		P
	Independent SELV controlgear comply with Annex I	(see Annex I)	P

6 (6)	CLASSIFICATION		—
	Independent controlgear	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
	Built-in controlgear	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	Integral controlgear	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	SELV-equivalent or isolating controlgear.....	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	Auto-wound controlgear	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	Independent SELV controlgear.....	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—

7	MARKING		P
7.1 (7.1)	Mandatory markings:		P
	- mark of origin		P
	- model number, type reference	ELP042C0700LSD1; ELP036C0700LSD1	P
	- symbol for independent controlgear, if applicable		P
	- correlation between interchangeable parts and controlgear marked		N/A
	- rated supply voltage (V)	220-240	P
	- earthing symbol		N/A
	- wiring diagram		P
	- value of t _c		P
	- symbol for declared temperature		P
	Constant voltage type:	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	- rated supply voltage (V)		N/A
	Constant current type:	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
	- rated output current (A)	0,7	P
	- rated maximum output voltage (V)	65 VDC for ELP042C0700LSD1; 48 VDC for ELP036C0700LSD1	P
	- indication if for LED modules only		N/A

IEC 61347-2-13

Clause	Requirement – Test	Result - Remark	Verdict
7.2 (7.1)	- information to be provided, if applicable		P
	- declaration on protection against accidental contact		P
	- cross-section of conductors (mm ²)	Input terminal: 0,5-0,75 mm ² ; Output terminal:0,75-1,5 mm ²	P
	- number, type and wattage of lamp(s)		P
	- directly mains-connected windings		N/A
	SELV-equivalent controlgear		N/A
- (7.2)	Marking durable and legible		P
	Rubbing 15 s water, 15 s petroleum; marking legible		P

8 (10)	PROTECTION AGAINST ACCIDENTAL CONTACT WITH LIVE PARTS		P
- (10.1)	Controlgear protected against accidental contact with live parts		P
- (A2)	The current flowing between the part concerned and earth is measured and does not exceed 0,7 mA (peak) or 2 mA d.c.		N/A
- (A2)	For frequencies above 1 kHz, the current does not exceed 0,7 mA (peak) multiplied by the value of the frequency in kilohertz or 70 mA (peak)		N/A
- (A3)	The voltage between the part concerned and any accessible part is measured and does not exceed 34 V (peak).....		N/A
- (10.1)	Lacquer or enamel not used for protection or insulation		P
	Adequate mechanical strength on parts providing protection		P
- (10.2)	Capacitors > 0,5 μF: voltage after 1 min (V): < 50 V:	< 0,5 μF	N/A
8.1 (-)	SELV-equivalent controlgear accessible parts are insulated from live parts by double or reinforced insulation according 8.6 and 13.1 in IEC 60065		N/A
8.2 (-)	Exposed terminals of SELV or SELV-equivalent controlgear are allowed if: - the rated or maximum output voltage does not exceeding 25 V r.m.s. - the no-load output voltage does not exceed 30 V r.m.s. or 33 √2 V peak		N/A
	Insulated terminals if rated output voltage >25 V		N/A

IEC 61347-2-13			
Clause	Requirement – Test	Result - Remark	Verdict

	<p>One capacitor Y1 or two capacitors Y2 of the same values used in series between SELV or SELV-equivalent output and primary circuits</p> <ul style="list-style-type: none"> - Capacitor complying with IEC 60384-14 - Other components bridging the separating transformer complying with IEC 60065, clause 14 		P
--	--	--	---

9 (8)	TERMINALS		P
	Screw terminals: compliance with Section 14 of IEC 60598-1	Approval terminal block(see appendix A)	P
	Screwless terminals: compliance with Section 15 of IEC 60598-1		N/A

10 (9)	PROVISION FOR EARTHING		N/A
	External metal parts connected to the earth-terminal:		N/A
	- compliance with 7.2.1 in IEC 60598-1		N/A
	Test with a current of 10 A between earthing terminal and each of the accessible metal parts; measured resistance (Ω): < 0,5 Ω		N/A
	Protective earth, symbol		N/A
	Terminal complying with clause 8 in Part 1		N/A
	Locked against loosening and not possible to loosen by hand		N/A
	Not possible to loosen clamping means unintentionally on screwless terminals		N/A
	Earthing via means of fixing		N/A
	Earthing terminal only used for the earthing of the control gear		N/A
	All parts of material minimizing the danger of electrolytic corrosion		N/A
	Made of brass or equivalent material		N/A
	Contact surface bare metal		N/A
	Conductors by tracks on printed circuit boards:		N/A
	- a.c. current of 25 A for 1 min between earthing terminal and accessible metal parts		N/A
	- compliance with clause 7.2.1 in IEC 60598-1		N/A

11 (11)	MOISTURE RESISTANCE AND INSULATION		P
----------------	---	--	----------

IEC 61347-2-13

Clause	Requirement – Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

	After storage 48 h at 91-95% relative humidity and 20-30 °C measuring of insulation resistance with d.c. 500 V (MΩ):		P
	≥ 2 MΩ for basic insulation.....:	> 100 MΩ	P
	≥ 4 MΩ for double or reinforced insulation.....:	> 100 MΩ	P
11 (-)	Adequate insulation between input and output terminals not bounded together in SELV-equivalent controlgear		N/A

12 (12)	ELECTRIC STRENGTH		P
	Immediately after clause 11 electric strength test for 1 min		P
	Working voltage ≤ 42 V, test voltage 500 V		N/A
	Working voltage > 42 V ≤ 1000 V, test voltage (V):		P
	Basic insulation, 2U + 1000 V	1480 V	P
	Supplementary insulation, 2U + 1750 V		N/A
	Double or reinforced insulation, 4U + 2750 V	3710 V	P
	No flashover or breakdown		P
	Windings in separating transformers in SELV-equivalent control gear according to 14.3.2 of EN 60065		N/A

13 (13)	THERMAL ENDURANCE FOR WINDINGS (Not applicable)	—
---------	---	---

14 (14)	FAULT CONDITIONS		P
	When operated under fault conditions the controlgear:		P
	- does not emit flames or molten material		P
	- does not produce flammable gases		P
	- protection against accidental contact not impaired		P
	Thermally protected controlgear does not exceed the marked temperature value		P
	Fault conditions: capacitors, resistors or inductors without proof of compliance with relevant specifications have been short-circuited or disconnected	(see appended table)	P
- (14.1)	Short-circuit of creepage distances and clearances if less than specified in clause 16 in Part 1 (except between live parts and accessible metal parts)	(see appended table)	N/A
	Distances on printed boards provided with coating according to IEC 60664-3		N/A

IEC 61347-2-13			
Clause	Requirement – Test	Result - Remark	Verdict
- (14.2)	Short-circuit or interruption of semiconductor devices	(see appended table)	P
- (14.3)	Short-circuit across insulation consisting of lacquer, enamel or textile	(see appended table)	N/A
- (14.4)	Short-circuit across electrolytic capacitors	(see appended table)	P
- (14.5)	After the tests the insulation resistance with d.c. 500 V (MΩ) are $\geq 1 \text{ M}\Omega$	> 100 MΩ	P
	After the tests the accessible parts has not become live		P
	During the tests, a five-layer tissue paper, where the test specimen is wrapped, does not ignite		P
	Temperature declared thermally protected controlgear fulfil the requirements in Annex C		P

15	TRANSFORMER HEATING	N/A
	Windings of separating transformer in a SELV-equivalent controlgear fulfil the requirements according to 7.1 and 11.2 of IEC 60065	N/A
15.1	Temperatures do not exceed the changed values of the values in column 2 of Table 3 of IEC 60065, in respect to relevant ambient temperature at t_c , under normal operation	N/A
15.2	Temperatures do not exceed the changed values of the values in column 3 of Table 3 of IEC 60065, in respect to relevant ambient temperature at t_c , under abnormal conditions of Cl. 16 and fault conditions of Cl. 14	N/A
	Ambient temperature at t_c	N/A

16	ABNORMAL CONDITIONS	P
	Safety not impaired when the controlgear is operated at any voltage between 90% and 110% of rated voltage	P
16.1	Control gear which are of the constant voltage output type:	—
	a) No LED module inserted	N/A
	b) Double LED modules or equivalent load connected to the output terminals	N/A
	c) Output terminal short-circuited (20 cm and 200 cm or declared length)	N/A

IEC 61347-2-13			
Clause	Requirement – Test	Result - Remark	Verdict

	During and at the end of the tests no defect impairing safety, nor any smoke or flammable gases produced		N/A
16.2	Control gear which are of the constant current output type:		—
	a) No LED module connected		P
	b) Double the LED modules or equivalent load connected in series to the output terminals		P
	c) Output terminal short-circuited (20 cm and 200 cm or declared length)	At both 20 and 200 cm	P
	Maximum output voltage not exceeded		P
	During and at the end of the tests no defect impairing safety, nor any smoke or flammable gases produced		P

17 (15)	CONSTRUCTION		P
- (15.1)	Wood, cotton, silk, paper and similar fibrous material not used as insulation		P
- (15.2)	Printed boards used as internal connections complies with clause 14 of IEC 61347-1		P
	Socket-outlet in the output circuit does not accept plugs complying with IEC 60083 and IEC 60906		N/A
	Not possible to engage plugs accepted by socket-outlet in the output circuit with socket-outlets complying with IEC 60083 and IEC 60906		N/A

18 (16)	CREEPAGE DISTANCES AND CLEARANCES		P
	Creepage distances and clearances according to Table 3 and 4, as appropriate	(see appended table)	P
	Printed boards see clause 14 of IEC 61347-1		P
	Insulating lining of metallic enclosures		N/A

19 (17)	SCREWS, CURRENT-CARRYING PARTS AND CONNECTIONS		P
	Screws, current-carrying parts and connections in compliance with IEC 60598-1 (clause numbers between parentheses refer to IEC 60598-1)		P
(4.11)	Electrical connections		P
(4.11.1)	Contact pressure		P
(4.11.2)	Screws:		N/A
	- self-tapping screws		N/A

IEC 61347-2-13

Clause	Requirement – Test	Result - Remark	Verdict
	- thread-cutting screws		N/A
	- at least two self-tapping screws		N/A
(4.11.3)	Screw locking:		N/A
	- spring washer		N/A
	- rivets		N/A
(4.11.4)	Material of current-carrying parts		P
(4.11.5)	No contact to wood		P
(4.12)	Mechanical connections and glands		P
(4.12.1)	Mechanical stress		P
	Screws not made of soft metal		P
	Screws of insulating material		N/A
	Torque test: part; torque (Nm): Fixed enclosure: 0,5 Nm		P
	Torque test: part; torque (Nm):		N/A
	Torque test: part; torque (Nm):		N/A
(4.12.2)	Screw diameter < 3 mm screwed into metal		N/A
(4.12.3)	Void		—
(4.12.4)	Locked connections		N/A
(4.12.5)	Screwed glands: force (N):		N/A

20 (18)	RESISTANCE TO HEAT, FIRE AND TRACKING		P
20 (18.1)	Parts of insulating material retaining live parts in position, ball-pressure test:		P
	- part; test temperature (°C): Enclosure; 115 °C		P
	- part; test temperature (°C): Bobbin of T1; 125 °C		P
20 (18.2)	Printed boards in accordance with IEC 60249-1, 4.3		P
20 (18.3)	External parts of insulating material preventing electric shock glow-wire test 650 °C	Enclosure	P
20 (18.4)	Parts of insulating material retaining live parts in position, needle-flame test 10 s:		P
	- flame extinguished within 30 s	Bobbin of T1; Terminal	P
	- no flaming drops igniting tissue paper		P
20 (18.5)	Tracking test		N/A

21 (19)	RESISTANCE TO CORROSION		N/A
	Rust protection:		N/A
	- test according 4.18.1 of IEC 60598-1		N/A



IEC 61347-2-13

Clause	Requirement – Test	Result - Remark	Verdict
	- adequate varnish on the outer surface		N/A
-(20)	NO-LOAD OUTPUT VOLTAGE		N/A
	No load output voltage not differ more than 10 % from rated voltage		N/A

IEC 61347-2-13

Clause	Requirement – Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

14	TABLE: tests of fault conditions	P
Part	Simulated fault	Hazard
Output terminal	Short-circuit; No hazards, recovered when removed the fault	NO
C19	Short-circuit; No hazards, recovered when removed the fault	NO
D9	Short-circuit; No hazards, drecovered when removed the fault	NO
Input circuit of U2	Short-circuit; No hazards, recovered when removed the fault	NO
Input circuit of U2	Open-circuit; No hazards, recovered when removed the fault	NO
Output circuit of U2	Short-circuit; No hazards, recovered when removed the fault	NO
Input circuit of U5	Short-circuit; No hazards, nothing have been found	NO
Output circuit of U5	Short-circuit; No hazards, recovered when removed the fault	NO
C9	Short-circuit; No hazards, recovered when removed the fault	NO
C8	Short-circuit; No hazards, recovered when removed the fault	NO
C7	Short-circuit; No hazards, recovered when removed the fault	NO
U1 pin4 and pin8	Short-circuit; No hazards, U1 damaged	NO
C4	Short-circuit; No hazards, the fuse-link operated	NO
C3	Short-circuit; No hazards, the fuse-link operated	NO
C2	Short-circuit; No hazards, unit flash, then recovered as normal	NO
C1	Short-circuit; No hazards, the fuse-link operated	NO
D1	Short-circuit; No hazards, the fuse-link operated	NO

IEC 61347-2-13

Clause	Requirement – Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

18 (16)	TABLE: creepage distances and clearances						N/A
	(See CENELEC COMMON MODIFICATIONS (EN))						
	Minimum distances for a.c. (50/60 Hz) sinusoidal voltages						N/A
	RMS working voltage (V) not exceeding	50	150	250	500	750	1000
1	minimum distances between live parts of different polarity. Specify the value measured.	—	—	—	—	—	—
2	minimum distances between live parts and accessible parts which are permanently fixed to the ballast, including screws or devices for fixing covers or fixing the ballast to its support. Specify the value measured.	—	—	—	—	—	—
	- required creepage distances (mm), insulation PTI ≥ 600	0,6	1,4	1,7	3	4	5,5
	- required creepage distances (mm), insulation PTI < 600	1,2	1,6	2,5	5	8	10
	- required clearances (mm)	0,2	1,4	1,7	3	4	5,5
3	minimum distances between live parts and a flat supporting surface or a loose metal cover, if any, if the construction does not ensure that the values under 2 above are maintained under the most unfavourable circumstances	—	—	—	—	—	—
	- required clearances (mm)	2	3,2	3,6	4,8	6	8
	Minimum distances for non-sinusoidal pulse voltages						N/A
	rated pulse voltage (peak kV)	2,0	2,5	3,0	4,0	5,0	6,0
	required minimum distances, clearances (mm)	1,0	1,5	2	3	4	5,5
	Specify the value measured	—	—	—	—	—	—
	rated pulse voltage (peak kV)	10	12	15	20	25	30
	required minimum distances, clearances (mm)	11	14	18	25	33	40
	Specify the value measured	—	—	—	—	—	—
	rated pulse voltage (peak kV)	50	60	80	100	-	-
	required minimum distances, clearances (mm)	75	90	130	170	-	-
	Specify the value measured	—	—	—	—	—	—

IEC 61347-2-13

Clause	Requirement – Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

A	ANNEX A (NORMATIVE), TEST TO ESTABLISH WHETHER A CONDUCTIVE PART IS A LIVE PART WHICH MAY CAUSE AN ELECTRIC SHOCK		N/A
A.2	See clause 8 A.2 in this Test Report		N/A
A.3	See clause 8 A.3 in this Test Report		N/A

C	ANNEX C – PARTICULAR REQUIREMENTS FOR ELECTRONIC LAMP CONTROLGEAR WITH MEANS OF PROTECTION AGAINST OVERHEATING		P
----------	---	--	----------

C3	GENERAL REQUIREMENTS		P
C3.1	Thermal protection means integral with the controlgear, protected against mechanical damage		P
	Renewable only by means of a tool		N/A
	If function depending on polarity, for cord-connected equipment protection means in both leads		N/A
	Thermal links comply with IEC 60691		N/A
	Electrical controls comply with IEC 60730-2-3		N/A
C3.2	No risk of fire by breaking (clause C7)	Inherently circuit feedback protection	P

C5	CLASSIFICATION		P
	a) automatic resetting type		—
	b) manual resetting type		—
	c) non-renewable, non-resetting type		—
	d) renewable, non-resetting type		—
	e) other type of thermal protection; description	Inherently circuit feedback protection	P

C6	MARKING		P
C6.1	Symbol for temperature declared thermally protected ballasts		P
C6.2	Declaration of the type of protection provided		P
C7	LIMITATION OF HEATING		P
C7.1	Preselection test		P
	Test sample placed for at least 12 h in an oven having temperature (tc - 5) K	75	P

IEC 61347-2-13

Clause	Requirement – Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

	No operation of the protection device		P
C7.2	Functioning of protection means		P
	Normal operation of the sample in a test enclosure according to Annex D at an ambient temperature such that ($t_c +0; -5$) °C is obtained		P
	No operation of the protection device		P
	Introducing of the most onerous test condition determined during test of clause 14		N/A
	Output of windings connected to the mains supply short-circuited, and other part of the controlgear operated under normal conditions		N/A
	Increasing of the current through the windings continuously until operation of the protection means		P
	Continuous measuring of the highest surface temperature		P
	Controlgear according to C5 a) or C5 e) operated until stable conditions are achieved		P
	Automatic-resetting thermal protectors working 3 times		N/A
	Controlgear according to C5 b) working 6 times		N/A
	Controlgear according to C5 c) and C5) d) working once		N/A
	Highest temperature does not exceed the marked value		P
	Any overshoot of 10% over the marked value within 15 min		N/A

D	ANNEX D – REQUIREMENTS FOR CARRY OUT THE HEATING TESTS OF THERMALLY PROTECTED LAMP CONTROLGEAR		P
	Tests in C7 performed in accordance with Annex D, if applicable		P

E	ANNEX E – USE OF CONSTANT S OTHER THAN 4500 IN t_w TESTS		N/A
----------	--	--	------------

E1	Constant S claimed		N/A
	Claimed test method		N/A
E2	Procedure A		N/A
	Adequate data provided by the manufacturer		N/A
	The inverse of the slope is greater than or equal to the claimed value of S		N/A

IEC 61347-2-13			
Clause	Requirement – Test	Result - Remark	Verdict

	Compliance with the failure criteria for procedure B		N/A
E3	Procedure B		N/A
	Claimed value of T ₁		N/A
	Claimed value of T ₂		N/A
	Endurance test carried out at:		N/A
	T ₁ (7 samples)		N/A
	T ₂ (7 samples)		N/A
	Duration of test calculated from equation (2)		N/A
	T ₁		N/A
	T ₂		N/A
	During the test: - No open circuit - No breakdown insulation		N/A
	The claimed constant S is deemed to be verified		N/A

F	ANNEX F - DRAUGHT-PROOF ENCLOSURE	P
----------	--	----------

	Draught-proof enclosure in accordance with the description		P
	Dimensions of the enclosure		P
	Other design; description		N/A

H	ANNEX H - TESTS	P
----------	------------------------	----------

	All tests performed in accordance with the advise given in Annex H, if applicable		P
--	---	--	---

I	ANNEX I - PARTICULAR ADDITIONAL REQUIREMENTS FOR INDEPENDENT SELV D.C. OR A.C. SUPPLIED ELECTRONIC CONTROLGEAR FOR LED MODULES	P
----------	---	----------

I.3	Classification		—
I.3.1	Class I	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	Class II	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
I.3.2	a) non-inherently short circuit proof controlgear	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	b) non-inherently open circuit proof controlgear	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	c) inherently short circuit proof controlgear	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—

IEC 61347-2-13

Clause	Requirement – Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

	d) inherently open circuit proof controlgear	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	e) fail safe controlgear	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	f) non-short-circuit proof controlgear	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	g) non-open-circuit proof controlgear	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
I.4	Marking		P
	Adequate symbols are used		P
I.5	Protection against electric shock		P
I.5.1	No connection between output winding and body		P
	No connection between output winding and protective earthing circuit		N/A
I.5.2	Input and output circuits electrically separated from each other		P
I.5.2.1	Insulation between input and output winding of the HF-transformer consists of double or reinforced insulation		P
	Class II: insulation between input/output and body consists of double or reinforced insulation		P
	Class I: insulation between input and body consists of basic and between output and body supplementary insulation		N/A
I.5.2.2	Insulation between input and output winding via the core consists of double or reinforced insulation		P
	Insulation between cord and windings of the HF-transformer consists of basic insulation		P
I.5.2.3	Serrated tape, additional layer		N/A
I.5.2.4	Class I controlgear for fixed connection provided with basic insulation plus protective screening comply with the following conditions:		N/A
	a) Insulation between the input winding and the protective screen complies with the requirements for basic insulation		N/A
	b) Insulation between the protective screen and the output winding complies with the requirements for basic insulation		N/A
	c) Metal screen consists of a metal foil or of a wire wound screen		N/A
	d) Metal screen so arranged that both edges cannot simultaneously touch a magnetic core		N/A

IEC 61347-2-13

Clause	Requirement – Test	Result - Remark	Verdict
	e) Metal screen and its lead-out wire have a cross-section sufficient to ensure that an overload device will open the circuit before the screen is destroyed		N/A
	f) Lead-out wire sufficiently fixed to the metal screen		N/A
I.5.2.5	Last turn of each winding of the transformer retained by positive means		P
	Impregnated winding		N/A
	Winding held together by means of insulating material		P
I.5.3	Components bridging between input and output circuit		P
I.5.3.1	Used capacitors and resistors comply with 8.2		P
I.5.3.2	Used opto-couplers		P
I.6	Heating		—
I.6.1	No excessive temperatures in normal use		P
	Used material classified as Class _____	E	—
	Stated value of t_a _____	50	—
I.6.2	Upri: 1.06 time supply rated voltage	254,4 V	—
	Determined temperature rises in windings:	ELP042C0700LSD1	P
	- Primary: _____ K	52	
	- Limit max: _____ K	65	
	- Secondary: _____ K	52	
	- Limit max: _____ K	65	
	After the test:		P
	- no connections have worked loose		P
	- no reduction of creepage distances and clearances		P
	- no flow of sealing compound		N/A
	- no operation of protecting devices		P
	- electric strength test between input and output windings		P
I.6.3	Cycling test (10 cycles):		N/A
I.6.3.1	- heat run at _____ K		N/A
I.6.3.2	- moisture treatment 48 h		N/A
I.6.3.3	- vibration test 1 h; 1,5 g		N/A

IEC 61347-2-13			
Clause	Requirement – Test	Result - Remark	Verdict
I.6.3.4	After the tests:		N/A
	- insulation resistance		N/A
	- dielectric strength test at 35 % of specified value; test voltage _____ V		N/A
	- Current or the ohmic component does not deviates by more than 30 %		N/A
I.7	Short-circuit and overload protection		P
I.7.1	U _{pri} : 1.06 times rated voltage or 0.94 and 1.06 times rated supply voltage - used voltage _____ V	254,4 V (Model No.: ELP042C0700LSD1)	P
I.7.2 I.7.3 I.7.4	Determined temperature rise in windings and on other parts:		P
	- test according to Clause _____	I.7.2	P
	- Primary winding _____ K	45	P
	- Limit max _____ K	115	P
	- Secondary winding _____ K	45	P
	- Limit max _____ K	115	P
	- External enclosure _____ K	15	P
	- Limit max _____ K	55	P
	- Rubber insulation of wiring _____ K		N/A
	- Limit max _____ K		N/A
	- PVC insulation of wiring _____ K	10	P
	- Limit max _____ K	35	P
	- Supports _____ K	21	P
	- Limit max _____ K	55	P
I.7.5	Fail-safe convertors		N/A
I.7.5.1	- U _{pri} : 1.06 times rated supply voltage V:		—
	- I _{sec} : 1.5 times rated output current A:		—
	- time until steady-state conditions t ₁ (h):		—
	- time until failure t ₂ (h): ≤ t ₁ ; ≤ 5 h:		N/A
I.7.5.2	During the test:		N/A
	- no flames, molten material, etc.		N/A
	- temperature rise of enclosure ≤ 150 K		N/A
	- temperature rise of plywood support ≤ 100 K		N/A
	After the test:		N/A

IEC 61347-2-13

Clause	Requirement – Test	Result - Remark	Verdict
	- electric strength (test voltage; 35 % of specified value); no flashover or breakdown for primary-to-secondary and for primary-to-body		N/A
	- live parts not accessible by test finger through holes of enclosure		N/A
I.8	Insulation resistance and electric strength		P
I.8.1	Conditioned 48 h between 91 % and 95 %		P
I.8.2	Adequate insulation (500 V d.c. for 1 min) between:		P
	Live parts and the body -for basic insulation not less than 2 MΩ		N/A
	Live parts and the body -for reinforced insulation not less than 4 MΩ	> 100 MΩ	P
	Input- and output circuits not less than 5 MΩ	> 100 MΩ	P
	Metal parts of class II controlgear which are separated from live parts by basic insulation only and the body not less than 5 MΩ		N/A
	Metal foil in contact with the inner and outer surfaces of enclosures of insulating material not less than 2 MΩ	> 100 MΩ	P
I.8.3	Electric strength test:		P
	1) Between live parts of input circuits and live parts of output circuits	3750 V	P
	2) Over basic or supplementary insulation between:		P
	a) live parts which are or may become of different polarity	1875 V	P
	b) live parts and body if intended to be connected to protective earth		N/A
	c) accessible metal parts and a metal rod of the same diameter as the flexible cable or cord		N/A
	d) live parts and an intermediate metal part		N/A
	e) intermediate metal parts and the body		N/A
	3) Over reinforced insulation between the body and live parts	3750	P
	No flashover or breakdown occurred		P
I.9	Construction		P
I.9.1	Comply with all requirements		P
I.9.2	The distance between input and output terminals shall not be less than 25 mm		N/A
I.10	Components		N/A

IEC 61347-2-13

Clause	Requirement – Test	Result - Remark	Verdict
I.10.1	Socket-outlets in the output circuit does not accept plugs complying with IEC 60083 and IEC 60906-1		N/A
I.10.2	Self-resetting protective devices shall not be used unless it is certain that there will be no hazards		N/A
	Compliance is checked by connecting the controlgear for 48 h at 1.06 times the rated voltage with the output short-circuited		N/A
I.11	Creepage distances and clearances		P
	1. Insulation between input and output circuits:		P
	a) measured values \geq specified values (mm)	Between component of primary circuit and secondary circuit: 7,0 mm (limit: 6,0 mm);	P
	b) measured values \geq specified values (mm)		N/A
	c) measured values \geq specified values (mm)	Three layers of insulation tapes as reinforced insulation, total dti. 0,25 mm (limit: 0,2 mm);	P
	2. Insulation between adjacent input circuits: measured values \geq specified values (mm)		N/A
	2. Insulation between adjacent output circuits: measured values \geq specified values (mm)		N/A
	3. Insulation between terminals for external connection:		N/A
	a) measured values \geq specified values (mm)		N/A
	b) measured values \geq specified values (mm)		N/A
	c) measured values \geq specified values (mm)		N/A
	4. Basic or supplementary insulation:		P
	a) measured values \geq specified values (mm)	3,6 mm (limit: 3,0 mm)	P
	b) measured values \geq specified values (mm)		N/A
	c) measured values \geq specified values (mm)		N/A
	5. Reinforced insulation: measured values \geq specified values (mm)	8,3 mm (limit: 6,0 mm)	P
	6. Distanse through insulation:		P
	a) measured values \geq specified values (mm)		N/A
	b) measured values \geq specified values (mm)	1,0 mm (limit: 1,0 mm)	P
	c) measured values \geq specified values (mm)		N/A
	d) measured values \geq specified values (mm)		N/A

IEC 61347-2-13

Clause	Requirement – Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

CENELEC COMMON MODIFICATIONS (EN)	P
--	----------

18 (16)	TABLE: creepage distances and clearances						P	
	Minimum distances for a.c. (50/60 Hz) sinusoidal voltages							
RMS working voltage (V) not exceeding	50	150	250	500	750	1000		
1 between live parts of different polarity	—	—	3,3 mm	—	—	—		
2 between live parts and accessible metal parts which are permanently fixed to the ballast, including screws or devices for fixing covers or fixing the ballast to its support	>6,0 mm	—	>6,0 mm	—	—	—		
3 for ballasts declared not to rely on the luminaire enclosure for protection against electric shock – between live parts and outer accessible surface of insulating parts	—	—	—	—	—	—		
Creepage distances	Basic insulation	PTI ≥ 600	0,6	0,8	1,5	3	4	5,5
		PTI < 600	1,2	1,6	2,5	5	8	10
	Supplementary insulation	PTI ≥ 600	--	0,8	1,5	3	4	5,5
		PTI < 600	--	1,6	2,5	5	8	10
	Reinforced insulation	--	3,2	5	6	8	11	
Clearances	Basic insulation		0,2	0,8	1,5	3	4	5,5
	Supplementary insulation		--	0,8	1,5	3	4	5,5
	Reinforced insulation		--	1,6	3	6	8	11